



HomeStyle®
CEILINGS


Fine Fissured™ Ceiling Panels

This HomeStyle® high performance Fine Fissured™ family of ceiling panels delivers performance for any space. It includes such features as HumiGuard Plus for superior sag resistance and BioBlock® coating for resistance to stain and odor causing mold and mildew. Installs in our Prelude® ceiling suspension system.

1728BL Fine Fissured Black

Inspiring Great Spaces™

Armstrong®

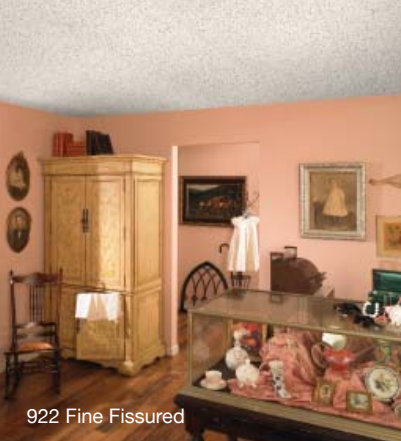

922 Fine Fissured



928 Fine Fissured



932 Fine Fissured



1728 Fine Fissured

HomeStyle® High Performance Fine Fissured™ Ceilings

HomeStyle® high performance Fine Fissured™ ceilings come in a variety of 24" x 24" and 24" x 48" styles, providing a sense of beauty to any room in the home, plus the added sag, mold, mildew and bacteria resistance.

STYLES:



922 Fine Fissured



928 Fine Fissured



932 Fine Fissured



1728BL Fine Fissured

FEATURES & BENEFITS

- Acoustical; reduces noise by up to 55%
- BioBlock® coating provides mold, mildew and bacteria resistance on the treated surface
- Sag resistance
- Reflects 85% of the light that strikes its surface for a brighter room*
- Easy installation system provides access to pipes, duct work and wiring

- Fine, non-directional texture reduces scrap and installation time
- Paintable to match any décor*
- Available in black
- Ideal for basements, kitchens, baths and other living areas
- Fire Performance Class A

*White panels only.

PRODUCT SPECIFICATIONS

Item # / Commercial Item #	Edge Detail	Dimensions	Install System	Acoustics NRC/CAC	Sag Resistance	Mold, Mildew and Bacteria Resistance	Light Reflection	Fire Rating	Recycle Content	SF/Ctn	Pcs/Ctn	Material Type
922 / 1729	 Square	24 x 48 x 5/8"	15/16"	0.55/35	Superior	Superior	0.85	Class A	40%	64	8	Mineral Fiber
928 / 1728	 Square	24 x 24 x 5/8"	15/16"	0.55/33	Superior	Superior	0.85	Class A	40%	64	16	Mineral Fiber
932 / 1732	 Tegular	24 x 24 x 5/8"	15/16"	0.55/35	Superior	Superior	0.85	Class A	40%	64	16	Mineral Fiber
1728BL* Black Panel	 Square	24 x 24 x 5/8"	15/16"	0.55/33	Superior	Superior	0.006	Class A	40%	64	16	Mineral Fiber


*Coordinating 64 sq. ft. black grid kit available – item 6357BL

30-year limited manufacturer's warranty when installed with Armstrong® recommended grid system (Ceiling panels alone are a 10-year limited manufacturer's warranty.)


INSTALLATION SYSTEM — PRELUDE® 15/16" SUSPENSION SYSTEM*




*Also available in black.



7301WH—12' Heavy Duty Main Beam - White
7300—12' Intermediate Duty Main Beam - White
7301BL—12' Heavy Duty Main Beam - Black



XL7348RWH—4' Stab Cross Tee - White
XL7328RWH—2' Stab Cross Tee - White
XL7342BL—4' Stab Cross Tee - Black
XL7328BL—2' Stab Cross Tee - Black



ML7343WH—4' Hook Cross Tee - White
ML7323WH—2' Hook Cross Tee - White
ML7343BL—4' Hook Cross Tee - Black
ML7323BL—2' Hook Cross Tee - Black

Visit www.armstrong.com for a ceiling materials estimator, installation instructions, videos, and more.

NOTE: Noise reduction coefficient (NRC), ceiling attenuation class (CAC), light reflectance (LR) and flame spread ratings are expressed according to ASTM E 1264 requirements.

HomeStyle®
CEILINGS

Armstrong®